

ABRASIVE

GRINDING TOOLS

虹屿实业（上海）有限公司

SIGNI INDUSTRIAL (SHANGHAI) CO.,LTD



SN -C-01 曲丝螺碗

SIZE:2.5" 3" 4" 5" 6"

THREAD:M10*1.25 M10*1.5 M14*2 M16*2 5/8-11NC

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -C-02 机用平型

SIZE:3" 4" 4.5" 5" 6" 7" 8" 10" 12"

INNER HOLE:20MM 32MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -C-03 曲丝盘型

SIZE: 4" 4.5" 5"

THREAD:M10*1.5 M14*2

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE




SN -C-04 孔平

SIZE:2" 3" 4" 5" 6"

INNER HOLE:10MM 13MM 16MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE

CUP BRUSHES
碗型刷系列

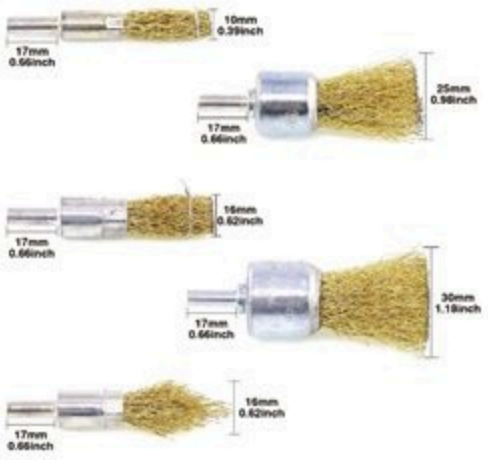

SN -C-05 笔刷

SIZE: 10MM 12MM 16MM 17MM 20MM 25MM 30MM

HANDLE:6MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -C-06 杆平

SIZE: 25MM 38MM 50MM 65MM 75MM 100MM

HANDLE:6MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -C-07 小孔平

SIZE: 25MM 38MM 50MM 65MM 75MM 100MM

HANDLE:6MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -C-08 杆碗

SIZE: 38MM 50MM 65MM 75MM 100MM

HANDLE:6MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE

TWISTED KNOT BRUSHES
扭丝刷系列

SIGNI ABRASIVE GRINDING TOOLS



SN -T-09 扭丝螺碗

SIZE:2.5" 3" 4" 5" 6"

THREAD:M10*1.25 M10*1.5 M14*2 M16*2 5/8-11NC

MATERIAL:STEL WIRE /STAINLESS STEEL WIRE



SN -T-10 扭丝除草轮

SIZE:6" 8"

INNER HOLE:25.4MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -T-11 扭丝平型

SIZE:3" 4" 4.5" 5" 6" 7" 8" 10" 12"

INNER HOLE:16MM 22.2MM

THREAD:M10*1.5 M14*2 5/8-11NC

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -T-12 扭丝笔刷/杆平/杆碗

SIZE:2" 2.5" 3"

HANDLE:6MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE

TWISTED KNOT BRUSHES
扭丝刷系列




SN -T-13 扭丝细股

SIZE; 4" 4.5" 5" 6" 7" 8"

INNER HOLE:16MM 22.2MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE

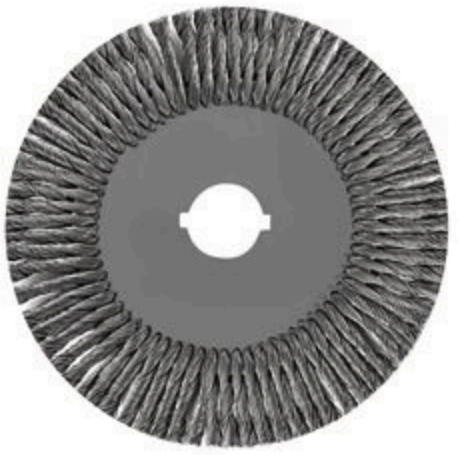

SN -T-14 大孔扭丝平型

SIZE; 10" 12" 14"

INNER HOLE:50MM

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -T-15 扭丝盘型

SIZE: 4" 4.5" 5"

THREAD:M10*1.25 M10*1.5 M14*2 5/8-11NC

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -T-16 扭丝杯型

SIZE: 3.5" 4" 4.5" 5"

THREAD: M14*2 5/8-11NC M16*2

MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -S-17 直头/弯头迷你刷

SIZE: 245MM 225MM

MATERIAL:PURE COPPER WIRE/STAINLESS STEEL WIRE/
STEEL WIRE/PLASTIC WIRE



SN -S-18 塑料柄刀型钢丝刷

SIZE: 245MM 235MM

MATERIAL:PURE COPPER WIRE/STAINLESS STEEL WIRE/
STEEL WIRE/PLASTIC WIRE



SN -S-19 3PC钢丝刷

SIZE: 210MM 170MM

MATERIAL:PURE COPPER WIRE/STAINLESS STEEL WIRE/
STEEL WIRE/PLASTIC WIRE



SN -S-20 多功能塑料柄钢丝清洁刷

MATERIAL:PURE COPPER WIRE/STAINLESS STEEL WIRE/
STEEL WIRE

WIRE BRUSHES
钢丝刷系列



SN -S-21 木柄刷

SIZE: 205*26*7

6*16

MATERIAL:PURE COPPER WIRE/STAINLESS STEEL WIRE/
STEEL WIRE



SN -S-22 加密不锈钢丝木柄刷

SIZE: 285*10*4

6*15

MATERIAL:STAINLESS STEEL WIRE



SN -S-23 加密不锈钢丝塑柄刷

SIZE: 265MM 165MM

MATERIAL:STAINLESS STEEL WIRE



SN -S-24 长柄钢丝刷

SIZE:200*25 300*25 450*25

STAINLESS STEEL WIRE SIZE:200*45 300*45 500*45

MATERIAL:STAINLESS STEEL WIRE

WIRE BRUSH SET
钢丝刷套装

SIGNI
ABRASIVE
GRINDING TOOLS



笔刷独立插卡泡壳包装



杆平独立插卡泡壳包装




杆碗独立插卡泡壳包装



3PC插卡泡壳包装



5PC插卡泡壳包装

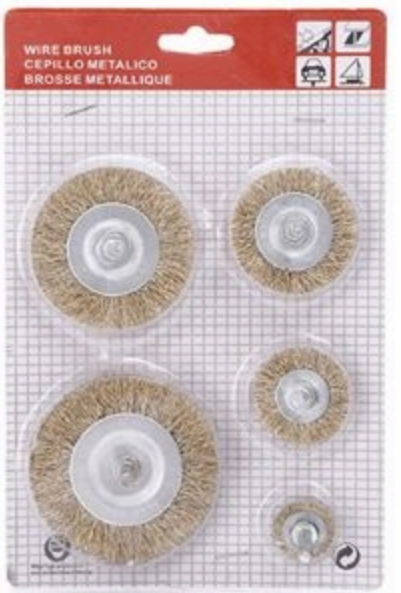

5PC杆平插卡泡壳包装



8PC插卡泡壳包装



6PC插卡泡壳包装



8PC插卡泡壳包装

CIRCULAR BRUSHES
轮刷系列



SN -W-35 不锈钢丝碗型刷

SIZE:100*10 125*16 150*22 180*22

MATERIAL:201/304STAINLESS STEEL WIRE



SN -W-36 钢丝碗型刷

SIZE:100*10 125*16 150*22 180*22

MATERIAL:STEEL WIRE /PURE COPPER WIRE



SN -W-37 不锈钢丝平型轮刷

SIZE:100MM 125MM 150MM 200MM 250MM 300MM 350MM

INNER HOLE:16MM 22MM 25MM 32MM 45MM 50MM

MATERIAL:STAINLESS STEEL WIRE



SN -W-38 钢丝平型轮刷

SIZE:100MM 125MM 150MM 200MM 250MM 300MM 350MM

INNER HOLE:16MM 22MM 25MM 32MM 45MM 50MM

MATERIAL: STEEL WIRE



SN -W-39 纯铜丝平型轮刷

SIZE:100MM 125MM 150MM 200MM 250MM 300MM 350MM

INNER HOLE:16MM 22MM 25MM 32MM 45MM 50MM

MATERIAL:PURE COPPER WIRE



SN -W-40 十字芯钢丝轮

SIZE:120MM SIZE:110MM

HT:100MM HT:100MM

INNER HOLE:20MM INNER HOLE:20MM

MATERIAL:PURE COPPER WIRE/STAINLESS STEEL WIRE/
STEEL WIRE



SN -W-41 钢丝花头

SIZE: 80MM

HT:105MM

TH:30MM

HANDLE:6MM


MATERIAL:STEEL WIRE /STAINLESS STEEL WIRE



SN -W-42 非标钢丝轮

NON-STANDARD
STEEL WIRE WHEEL

PLANE PAGE WHEEL SERIES
平面砂布轮

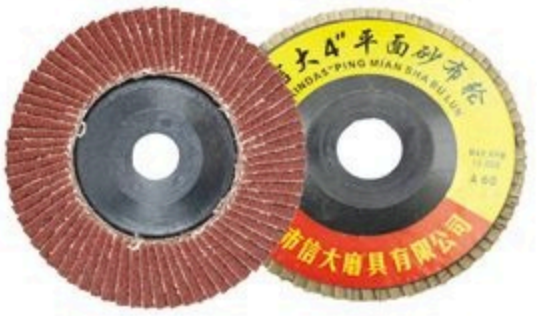

SN ·F-119 塑盖百页片

75 PLASTIC COVER

SIZE COMPOSITION:60# 80# 120# 240# 320#

DIAMETER:100MM

INNER HOLE:16MM



SN ·F-120 网盖百页片

75 NET IMPELLER COVER

SIZE COMPOSITION:60# 80# 120# 240# 320#

DIAMETER:100MM

INNER HOLE:16MM




SN ·F-121 铁盖百页片

METAL CAP

SIZE COMPOSITION:60# 80# 120# 240# 320#

DIAMETER:100MM

INNER HOLE:16MM

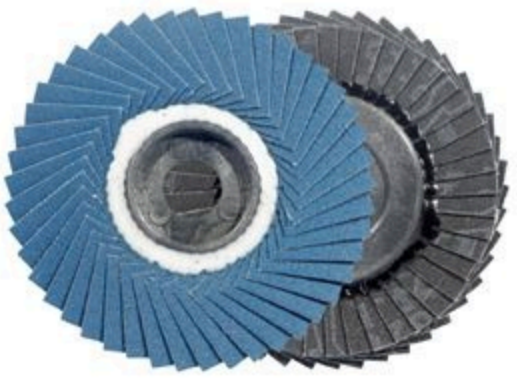

SN ·F-122 韩式页轮

KOREAN DISH FLOWER WHEEL

SIZE COMPOSITION:60# 80# 120# 240# 320#

DIAMETER:100MM

INNER HOLE:16MM



SN -F-123 带柄页轮

WITH HANDLE IMPELLER

SIZE :20MM 25MM 30MM 40MM 50MM 60MM 70MM 80MM 100MM

TH:25MM

SIZE COMPOSITION:60# 80# 120# 240# 320#



SN -F-124 百洁布页轮

WITH HANDLE CLOTH WHEEL

SIZE : 25MM 30MM 40MM 50MM 60MM 70MM 80MM

TH:25MM 30MM 40MM 50MM

SIZE COMPOSITION:60# 80# 120# 240# 320#



SN -F-125 活柄页轮

WITH HANDLE IMPELLER

SIZE : 8*8*3 10*10*3 12*12*3 15*14*3

20*4*3 20*16*3 20*16*6 25*5*3 25*10*6 25*20*6

25*25*6 30*5*3 30*5*6 30*10*6 30*20*6 30*25*6

40*5*6 40*10*6 40*20*6 40*25*6 50*5*6 50*10*6 50*20*6

50*25*6

SIZE COMPOSITION:60# 80# 120# 240# 320#



SN -F-126 干页轮

FLAP WHEELS

SIZE : 150MM 250MM 300MM

TH:25MM 30MM 35MM 50MM

SIZE COMPOSITION:60# 80# 120# 240# 320#

NYLON POLISHING WHEEL
尼龙纤维轮系列



SN VP-001 尼龙纤维轮

SIZE:5" 6" 8" 10" 12" 14" 16"

INNER HOLE:16MM

GRIT:80#-800#



SN VP-002 100型尼龙轮

SIZE:4"

INNER HOLE:16MM

GRIT:80#-800#



SN VP-003 尼龙磨头

SIZE:20MM 25MM 30MM 35MM 40MM 45MM 50MM 60MM 80MM

HANDLE:6MM

GRIT:80#-800#



SN VP-004 菜瓜磨头

SIZE:14MM 28MM

HANDLE:3MM

GRIT:180#-1500#



SN·A-200 磨料丝刷头

SIZE: 80MM

HT:105MM

TH:30MM

HANDLE:6MM

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320# 400# 600# 800# 1000#



SN·A-201 磨料丝杆碗刷

SIZE: 50MM 75MM

HANDLE:6MM

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320# 400# 600# 800# 1000#



SN·A-202 磨料丝杆平刷

SIZE: 50MM 75MM 100MM

HANDLE:6MM

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320# 400# 600# 800# 1000#



SN·A-203 磨料丝笔刷

SIZE: 12MM 16MM 20MM 25MM 30MM

HANDLE:6MM

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320# 400# 600# 800# 1000#

ABRASIVE WIRE
磨料丝刷系列



SN A-204 磨料丝平型刷

SIZE: 50MM 75MM 100MM 125MM 150MM

INNER HOLE:16MM 22.2MM

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320# 400# 600# 800# 1000#



SN A-205 3MM杆磨料丝打磨头

SIZE: 13MM 16MM 20MM 25MM 38MM

HANDLE:3MM

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320#



SN A-206 磨料丝碗型刷

SIZE: 100MM 125MM 150MM

INNER HOLE:16MM 22MM

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320# 400# 600# 800# 1000#



SN A-207 磨料丝螺碗刷

SIZE: 75MM 100MM 125MM 150MM

THREAD:M10*1.25 M10*1.5 M14*2 M16*2 5/8-11NC

MATERIAL:ABRASIVE WIRE 60# 80# 120# 180# 240# 320# 400# 600# 800# 1000#



SN SP-300 自粘盘

SIZE:4" 5" 6" 7" 8" 9"

THREAD:M10 M14 M16



SN SP-301 六角螺母自粘盘

SIZE:4" 5" 6" 7" 8" 9"

THREAD:M10 M14



SN SP-302 气动盘

SIZE:1" 2" 3" 4" 5" 6"


THREAD:M6 M8



SN SP-303 植绒砂纸片

SIZE:4" 5" 6" 7" 8"

GRIT :60# 80# 120# 180# 240# 320# 400#
600# 800# 1000#

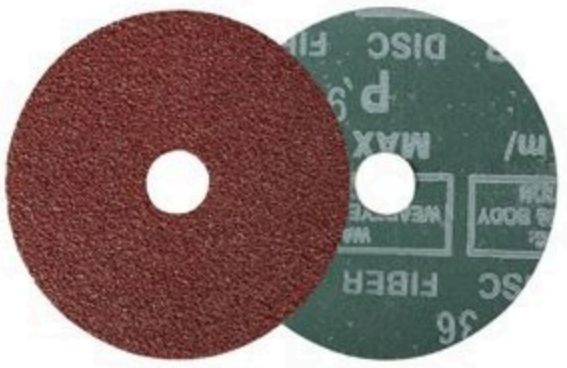

SN SP-304 钢纸磨片

SIZE:4" 5" 7"

GRIT : 24# 36# 40# 60# 80# 120#



SN SP-305 红钢纸砂盘

SIZE:4" 5" 6" 7"

INNER HOLE:16MM 22MM

GRIT : 20# 24# 36# 60#



SN SP-306 铜铝磨片

SIZE:4" 5" 6" 7"

INNER HOLE:16MM 22MM

GRIT: 20# 24# 36# 60#



WARM PROMPT

温馨提示

Sander is one of the most commonly used hand tools in pipe laying. The machine can be used to grind flat or cylindrical steel products, as well as pipe joints before welding. Remove grinding wheel, grinding machine can also install wire brush or polishing wheel accessories. In the process of use, pay attention to safety measures:

1. Ensure that the grinding wheel has a protective cover.
2. The grinding wheel should be checked for cracks or defects before use. Do not use abrasive wheels that are excessively worn or damaged.
3. Check whether the power is grounded and whether the power cord is in good condition.
4. When in use, the permitted speed marked on the grinding wheel shall be higher than the speed marked on the grinding machine. (always check the marks of grinding wheel and grinding machine to make sure that they match.)
5. The grinding wheel should be stored as follows: when moving one of the grinding wheels, the other grinding wheel cannot be touched.
6. When storing the grinding machine, do not make the grinding wheel contact with water or solvent. Avoid extreme cold or high humidity.
7. Prevent the grinding wheel from falling or colliding accidentally.
8. Perform "echo" detection before installation. Echo detection is very simple. The operator may tap the grinding wheel with a light non-metallic tool (such as a screwdriver handle) to keep it dry and clean. The grinding wheel is in good condition if it makes a clear metallic sound when struck. If the sound is dull, the grinding wheel may have broken.
9. If the grinding wheel, steel brush or polishing wheel is newly installed, the grinding machine should be started before use. If the grinding machine is excessively shaken after starting, the grinding machine should be stopped and received for maintenance.
10. The grinder should run at full speed before the grinding wheel comes into contact with the metal surface.
11. Stop the grinding wheel completely before installing the grinding machine.
12. Ensure that operators carry appropriate personal protective equipment, including at least goggles and masks, and gloves, dust masks and hearing protection are recommended. In addition to avoid wearing loose clothes, the following pendulum wider clothes, in case of twisting into the sander.

打磨机是管道铺设中最为常用的手工工具之一。这种机器可以用来打磨平板或圆柱形钢制品，另外，在焊接之前还可以用这种机器打磨管道接口。除去砂轮，打磨机还可以安装钢丝刷或抛光轮等附件。在使用过程中，要注意安全防护措施：

1.确保砂轮有保护罩。 2.使用之前应当检查砂轮是否有裂纹或缺陷,勿使用过度磨损或损伤的砂轮。 3.检查电源是否接地，电源线是否完好。 4.使用时，砂轮片上标明的允许使用速度应高于打磨机上标明的速度。(要经常检查砂轮和打磨机上的标识，确保二者相匹配) 5.应这样存放砂轮：搬动其中一只砂轮时碰不到其它砂轮。 6.存放打磨机时，不得使砂轮与水或溶剂等接触。同时要避免极冷或高湿环境。 7.要防止砂轮意外跌落或者碰撞。 8.安装前实施"回声"检测。回声检测操作非常简单。操作者可以使用较轻的非金属工具轻轻敲打砂轮(需保持砂轮干燥洁净)，如螺丝刀把。如果敲击发出清脆的金属声，说明砂轮状况良好。如果声音较为沉闷，说明砂轮可能已经破裂。 9.如果砂轮、钢刷或者抛光轮是新装的，使用前要试启动，如果启动后打磨机过度摇晃，该打磨机应停用并接收检修。 10.在砂轮与金属表面接触之前，打磨机应全速运转。 11.安放打磨机之前应使砂轮完全停下来。 12.要确保操作人员携带合适的个人保护设备，其中至少包括防护镜和面罩，同时建议佩带手套，防尘面具及听力保护装置。另外要避免穿着宽松的衣服，如下摆较宽的衣服，以防绞入打磨机。



ABRASIVE

GRINDING TOOLS

虹屿实业（上海）有限公司

SIGNI INDUSTRIAL (SHANGHAI) CO.,LTD

ADD: No.439,Jinglian Road,4A-417,Shanghai,China 2011008

MOB: +86 15821847679

E-MAIL: sales@signicn.com

WEB: www.signicn.com